FIGHTER X

FM65F TH (TRACTOR HEAD) | 270PS | 4X2

APRIL 26

FUSO

www.ktbfuso.co.id

Performa

270PS
Common Rail

Mesin 6M60 yang dilengkapi dengan ***Variable Geometry Turbocharger (VGT)*** mampu menghasilkan torsi dan tenaga maksimal di putaran mesin yang rendah.

Dengan ***Exhaust Gas Recirculation (EGR)*** dan ***Positive Crankcase Ventilation (PCV)*** yang didukung oleh ***Diesel Oxidation Catalyst (DOC) Muffler*** menghasilkan emisi gas buang ramah lingkungan.

Transmisi Eaton ES-11109

Memberikan perpindahan gigi yang halus, mudah dioperasikan dan cocok untuk berbagai kondisi berkendara, termasuk saat menanjak dengan muatan berat.

Keamanan & Kenyamanan

Kabin Modern & Rigid

Rigid cabin yang dirancang modern dengan kaca depan yang lebar untuk memberikan jarak pandang maksimal sehingga menambah keamanan bagi pengemudi.

Kenyamanan Berkendara

Ruang kabin luas yang dilengkapi dengan air suspension pada kursi pengemudi, posisi jok dapat diatur jarak dan kemiringan sudutnya, kemudi yang dapat diatur tinggi dan jaraknya, dan spring yang ditingkatkan untuk kenyamanan pengendara

Tractor Head Package

Rotary Lamp | **Toolbox Assy** | **Bracket Spare Tire Assy**

Base Plate Assy | **Fifth-wheel Corrugate Plate Assy** | **Tire Stopper**

Wheelhouse Assy LH/RH | **SUPD Assy LH/RH**

Telematic System

Job order planning
Perencanaan Kerja (Driver, Vehicle, Routes & Area).

Driver management
Pengaturan Penugasan Pengemudi.

Vehicle management
Pengaturan Penggunaan & Perawatan Kendaraan.

Real time monitoring
Mengetahui Lokasi, Situasi & Status Perjalanan Kendaraan.

Report / Evaluation
Laporan & Analisa Terkait Pengoperasian Kendaraan.

Dimensi Kendaraan

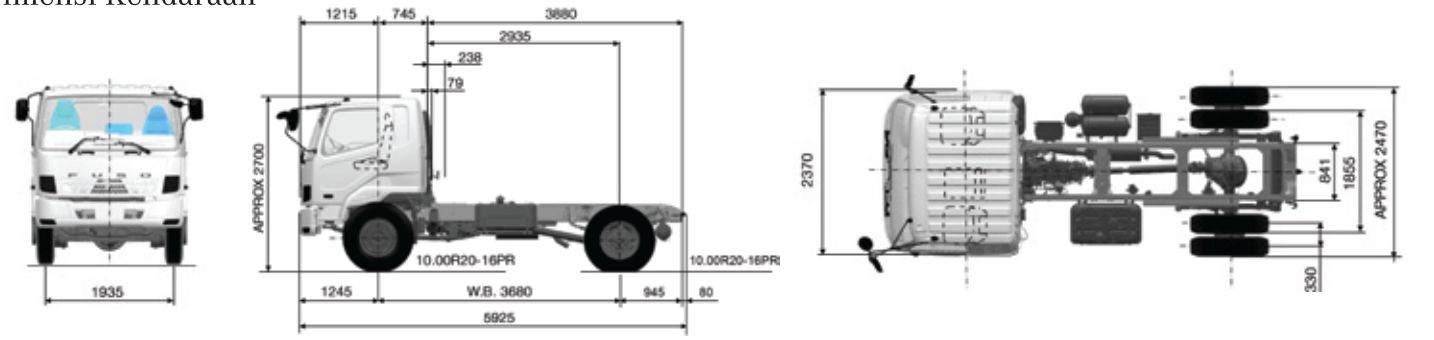

MODEL 4x2: FM65F TH (TRACTOR HEAD)

DIMENSI	
Jarak Sumbu Roda	3.680 mm
Panjang Keseluruhan	5.925 mm
Lebar Keseluruhan	2.470 mm
Tinggi Keseluruhan	2.860 mm
Jarak roda depan kiri-kanan	1.935 mm
Jarak roda belakang kiri-kanan	1.855 mm
KABIN PENGEMUDI	
Tipe	All steel, tilt cab
	(Kabin Jungkit)

KEMAMPUAN	
Kecepatan Maksimum	92 km/Jam
Daya tanjak dengan Max G.C.W	36.000 kg
Radius putar minimum	6.5 m (without Trailer)
BAN & RODA	
Ban depan	Tunggal, 10.00R-20-16PR
Ban belakang	Ganda, 10.00R-20-16PR
KAPASITAS BAHAN BAKAR	
Tangki	200 liter

REM	
Rem kaki (Service brake)	Full air, dual circuit, wedge type
Rem tangan (Parking brake)	Spring loaded type on rear wheels by hand controlvalve
Rem pembantu	Sistem pengereman gas buang (Exhaust brake)
SUSPENSI	
Depan	Laminated leaf springs dengan shock absorber
Belakang	Laminated leaf springs
KEMUDI	
Tipe	Ball nut type with integral type hydraulic power booster, telescopic & tilt steering column with steering lock

BERAT	
Berat chassis termasuk kabin	5.635 kg
Depan	3.235 kg
Belakang	2.400 kg
Max G.V.W | G.C.W	16.000 kg | 36.000 kg
Depan	6.000 kg
Belakang	10.000 kg
SISTEM KELISTRIKAN	
Tegangan	24 V

TRANSMISI	
Model	EATON ES-11109
Tipe	9 gigi maju dan 1 gigi mundur
Perbandingan gigi	12.640 - 8.810 - 6.550 - 4.770 - 3.550 - 2.480
	- 1.850 -1.340 - 1.000 Mundur 13.21
Perbandingan gigi akhir	**5.571**
Tipe Kopling	Hydraulic control, coil spring type, single
	dry plate with air pressure assistance

MESIN	
Model	6M60 - DAT6
Tipe	4 Stroke-cycle water cooled direct
	injection turbocharged diesel engine,
	Common Rail, EURO4
Diameter X Langkah	118x115 mm
Isi Silinder	7.545 cc
Daya Maksimum	270/2.400 PS/rpm
Torsi Maksimum	880/1.200 - 2.000 Nm/rpm

CATATAN : Untuk peningkatan & penyesuaian dengan perkembangan teknologi, spesifikasi ini sewaktu-waktu dapat berubah tanpa pemberitahuan terlebih dahulu.

**Syarat dan ketentuan berlaku.*

MITSUBISHI FUSO authorized distributor
PT Krama Yudha Tiga Berlian Motors
www.ktbfuso.co.id
Manufactured at PT Krama Yudha Ratu Motor, Jakarta- Indonesia

BENGKEL 24 JAM NON STOP
PARTS DEPO
GARANSI 3 TAHUN atau 100.000 km
FREE SERVICE 40.000 KM* 2 TAHUN